

PTP-004

PANDORA TILT PLATE KIT

The Pandora #PTP-004 Tilt Plate kit includes a special mount for use with the DPC-161 and CX161-BW CCD cameras. The revised Tilt Plate mount replaces item #9 provided in the stock Pandora Kit.

1 PTP-004 TOP VIEW (COCKPIT) CAMERA MOUNTING INSTRUCTIONS:

- 1.1 Begin your Pandora assembly by substituting the PTP-004 tilt plate with item #9 in the Pandora kit.
- 1.2 Using the details seen in Figures 1, 2, and 3, install the CCD camera. The DPC-161 camera is shown in these examples.
- 1.3 Be sure to strain relief the A/V cable and route it so that it does not inhibit pan and tilt movement.

Note: If you look closely at Figure 3 you may notice that the A/V cable has a piece of solid wire looped around it and screwed to the nearby stand-off. This is one way to strain relief the cable, but you can choose any method that suits your application.



Figure 1, Top Mount

2-56 x 3/16" Screw

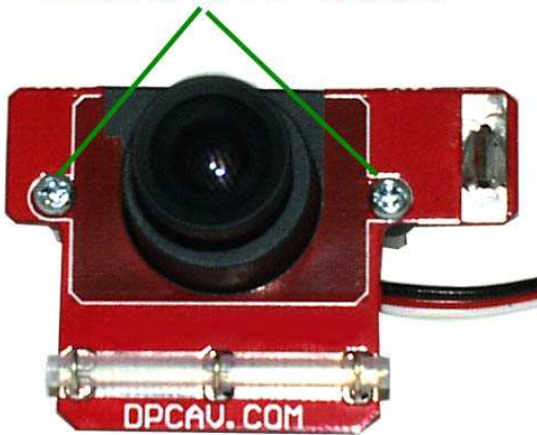


Figure 2, Front Hardware

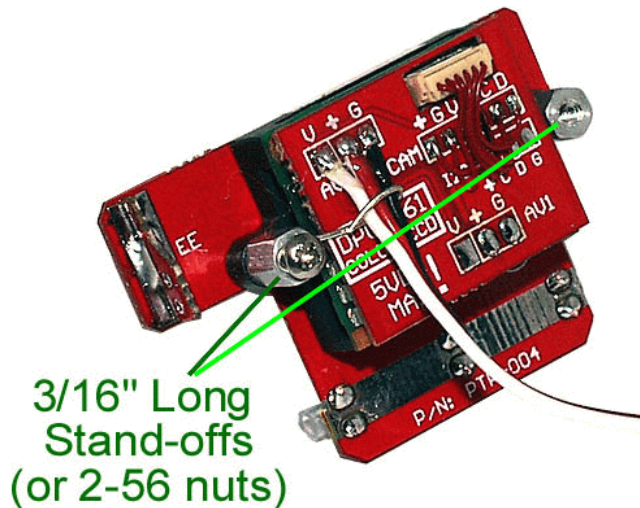


Figure 3, Rear Hardware

